


Viscosimètre Cannon-Ubbelohde

Réf. : –

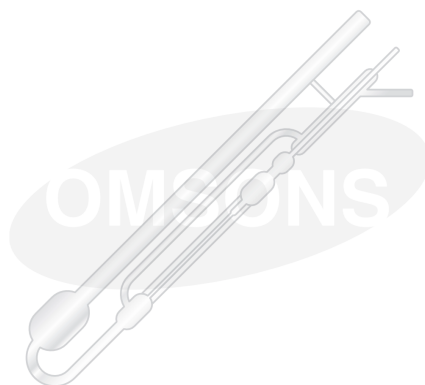

SPÉCIFICATIONS PAR MODÈLE

N° de catalogue	Dimensions	Nominal Constant	Étendue de viscosité [ASTM D 446]	Conditionnement
618/1	25	0.002	0.5 to 2	1
618/2	50	0.004	0.8 to 4	1
618/3	75	0.008	1.6 to 8	1
618/4	100	0.015	3 to 15	1
618/5	150	0.035	7 to 35	1
618/6	200	0.1	20 to 100	1
618/7	300	0.25	50 to 250	1
618/8	350	0.5	100 to 500	1
618/9	400	1.2	240 to 1200	1
618/10	450	2.5	500 to 2500	1
618/11	500	8	1600 to 8000	1
618/12	600	20	4000 to 20000	1

CARACTÉRISTIQUES TECHNIQUES